


6 5 4 -FOLD 3 2 1

D

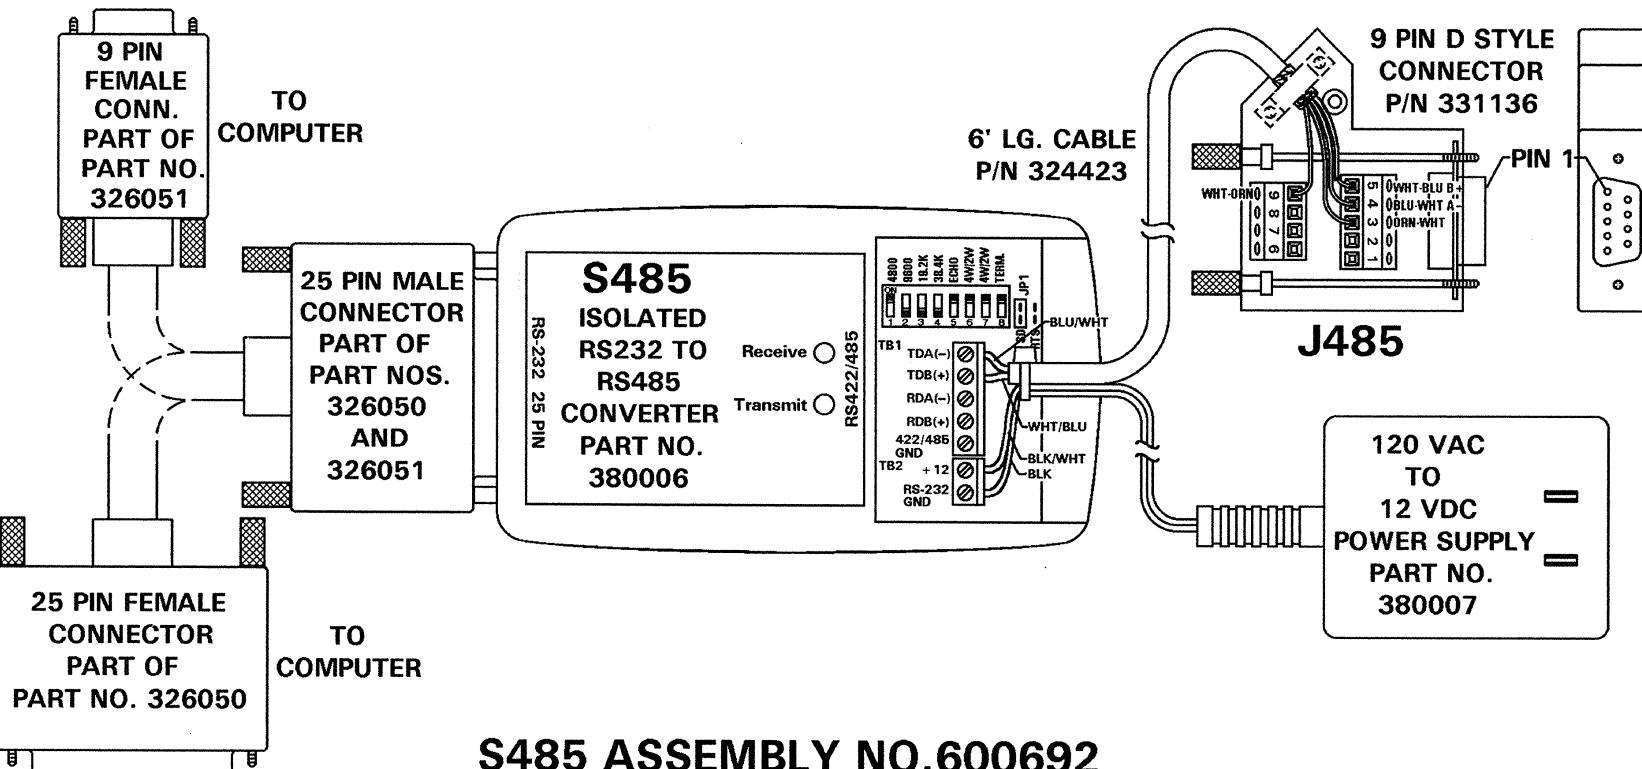

Notes:

- When provided by Manufacturer send Manual included with Converter, Isolated, RS232 to RS485/422, P/N 380006 to customer.

605923

6 11x17 ENTRON 470048

5

4

-FOLD

3

2

1

PARTS LIST 600692

QTY	DESIG.	DESCRIPTION	PART NO.
1	S485	CONVERTER, ISOLATED, RS232 TO RS485/422	380006
1	J485	CONN., 9 PIN, SCREW TERMINAL, "D" STYLE, PLUG	331136
1		XFMR, POWER SUPPLY, 120 VAC TO 12 VDC, WALL PLUG	380007
1		CABLE, 4 COND., 24 GA. STRANDED W/SHIELD, 6 " LG.	324423
1		CABLE TIE, 1/2" DIAM. WRAP	342002
1		LABEL, "TESTED BY:"	460237
1		LABEL, CONVERTER, S485	460276
1		LABEL, J485	460228
1		CABLE, DB25 MALE TO FEMALE, 6' LG.	326050
1		LABEL, CABLE, 326050	460273
1		CABLE, DB25 MALE TO DB9 FEMALE, 6" LG.	326051
1		LABEL, CABLE, 326051	460274
1		MANUAL, RS485	700171
1		WIRING DIAGRAM, RS485 INTERCONNECT	421407

421449 - DRAWING NUMBER REV

— —		ORIGINAL RELEASE	DRWN	CHKD
REV	AUTH	DESCRIPTION	BY	BY DATE
ENTRON				
SCALE	DATE	DRAWN BY	CHK'D BY	APPROVED BY
x	10/1/01	RHL		
TOLERANCE UNLESS SPECIFIED				
ANGLES: $\pm \frac{1}{2}^\circ$			REV LTR	APPROVED BY
DECIMALS: $\pm .010$				
FRACTIONS: $\pm 1/64$			DATE	
WIRING DIAGRAM, CONVERTER, S485				
NEXT ASSM/USED ON			DRAWING NUMBER	REV
			421449 -	

421449 - DRAWING NUMBER REV