

Medium Frequency DC constant current control and proportional force control for spot, projection and seam welding applications, up to 6000A primary current, 500,000A secondary current.



- Mounts directly to iPAK and iPAK2 inverters.
- Pendant , Modbus , NetFlash programming.

FEATURES

- 256 weld programs (schedules).
- 3 weld Intervals — Pre-heat + Main weld + Post heat.
- Cascade / multivalve operation.
- Up to 8 transformers and 8 main valve (WAV) outputs.
- 7 auxiliary valves under program control.
- 16 Inputs/ 16 Outputs (short circuit protected). Dedicated function.
- Secondary or Primary current regulation.
- Ethernet (2 simultaneous connections).
- RS232 Port.
- RS485 Port.
- Analog Port connects to Proportional Valve for weld force control , or can output a measured current waveform. Can also be used for direct analog control function.
- Force profiling.
- Electrode manager (Stepper functions) for up to 8 electrodes.
- Current and force monitor.
- Seam mode—change programs ‘on the fly’, up to 8 MOTOR command outputs.
- Standard features mode reduces the available options for simple applications.
- Feature and programming format common with EN7000 AC control.
- EtherNet/IP supported via plug-in adapter option.

Comparison of iPAK2 with iPAK	iPAK	iPAK2
Compatible with iPAK inverter	✓	✓
Compatible with iPAK2 inverter	✓	✓
Weld Programs (schedules)	64	256
Weld intervals	2	3
Duty-cycle limiter	✗	✓
Real-time clock	✗	✓
Data log entries	64	6144
Direct MUX drive	✗	✓
Analog control mode	✗	✓
Safety relay	✗	✓
Short circuit proof outputs	✗	✓
Air-valve outputs	2	8
WSP3 programming	✓	✓
NetFlash programming	✓	✓
Ethernet ports	0	2
RS485 ports	0	1
Commonality with EN7000	✗	✓



Example: Complete iPAK 600A system.


Example: Complete iPAK 600A system with 4 transformer outputs.



iPAK2 CPU

NetFlash PC Software for Ethernet (option)

Easy to use Networked PC. Access iPAK, iPAK2, WS2003, EN7000.

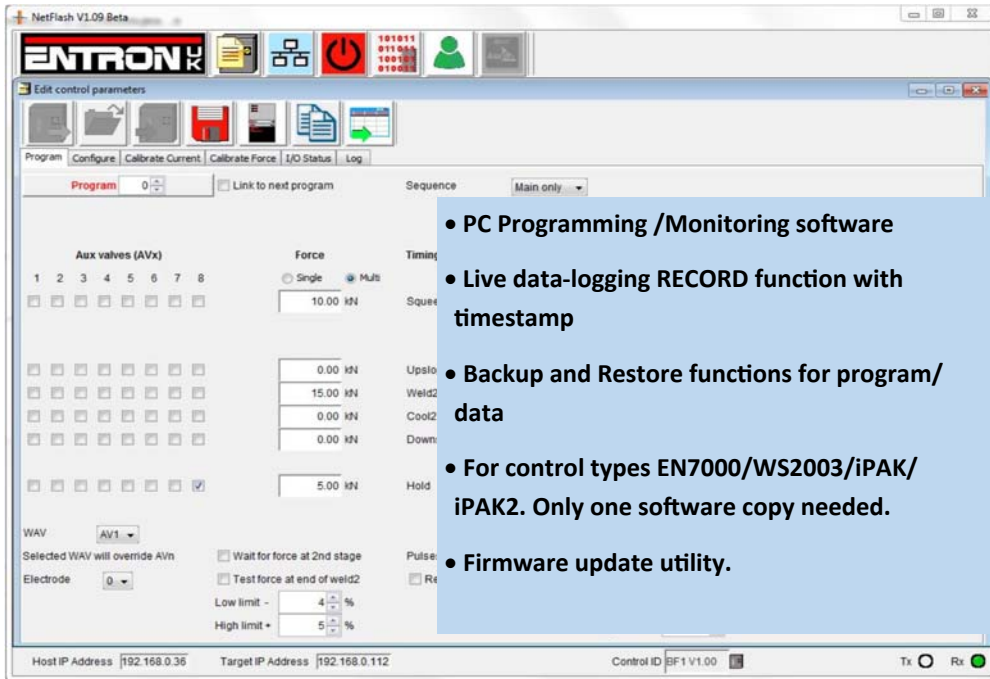

WSP3 Pendant (option)

Easy, intuitive 4 line display


MULTIPLE COMMUNICATIONS SUPPORT :

Modbus-TCP/IP (Ethernet), Modbus-RTU (RS485), RS232 all built-in. EtherNet/IP and other Fieldbuses supported via plug-in adapter option.

MULTIPLE CONTROL METHODS: Discrete I/O plus analog 0-10V, Modbus TCP/IP (Ethernet), Modbus-RTU (RS485), EtherNet/IP.

PROGRAMMING METHODS : Pendant (RS232), HMI RS485 , HMI or PC software Ethernet TCP/IP, EtherNet/IP.

DATA-LOGGING (Spot mode): Internal data-logging up to 6000 records. Data can be recorded to hard drive through NetFlash.

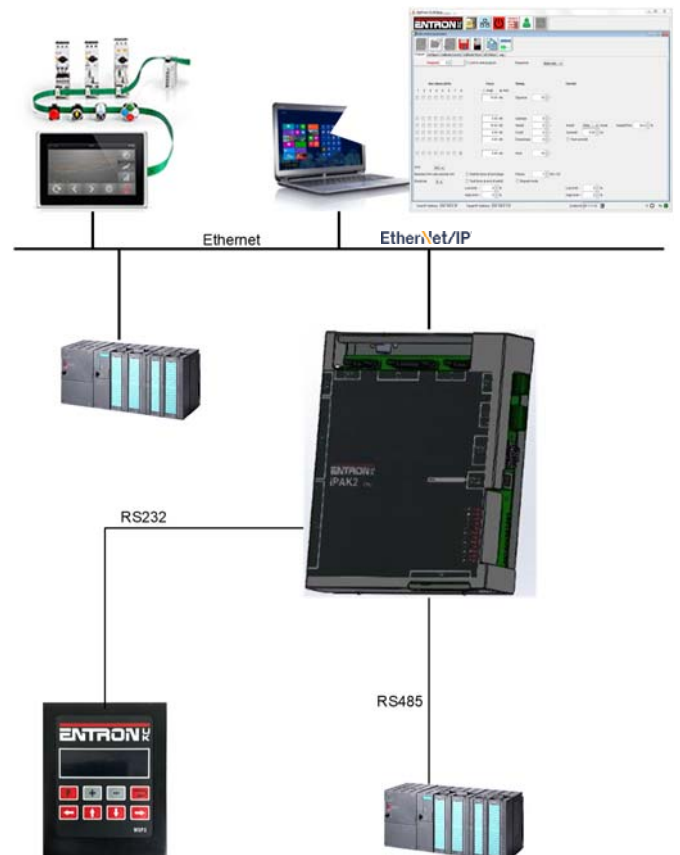

BF Entron Ltd. England.

Tel: +44 (0)1384 455401

Entron Controls LLC. USA.

Tel: 864-416-0190

Entron Controls De Mexico.

Tel: +52 (844) 415 9081

www.entroncontrols.com

Issue 1.3